



Easily confirm flow of liquids


SIGMAMOTOR Visual Flow Indicators will enhance your chemical feed systems by allowing visual indication of the flow of liquid in the system.

The Visual Flow Indicator allows for viewing of flow through a clear NSF61 approved PVC or glass flow tube.

- CNC precision machined ends
- Clear sight tube
- NSF-61 approved materials
- 150 psi maximum pressure
- Available in PVC or glass with protective cover
- Glass end caps available in a variety of materials



Typical System

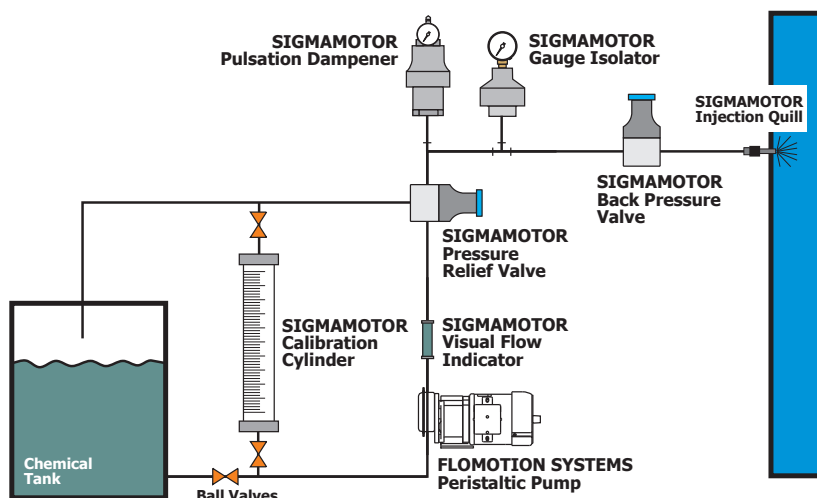

END CAP CONNECTIONS




End caps are permanently attached to the top of the PVC indicators and are removable on the glass indicators. They are available with NPT, socket, flanged or union connections.

VFI: - - -
 1 2 3* 4*

* Glass Only

Glass Example: VFI-G-N-P-V
 PVC Example: VFI-P-N

DIMENSIONS

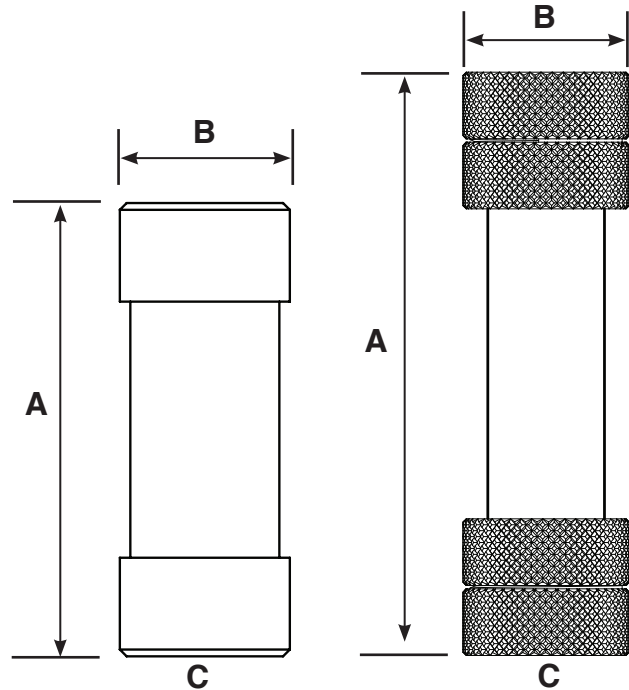

TYPE 1		
SELECT:	G (GLASS)	P (PVC)
A-Height (in)	8.75	4
B-Diameter (in)	2.5	1.5
C-Connection (in)	1/2	1/2

PROCESS CONNECTION TYPE 2	
NPT	N
SOCKET	S
FLANGED	F
UNION	U

PROCESS CONNECTION MATERIAL (GLASS ONLY) 3	
PVC	P
POLYPROPYLENE	PP
CPVC	CP
PTFE	T
Kynar® PVDF	K
316 SS	S
ALLOY 20	A
HASTELLOY C276	H

O-RING MATERIAL FOR GLASS ONLY 4	
VITON	V
EPDM	E
TEFLON ENCAPSULATED	T

Material:	Glass	PVC
Maximum Pressure:	100 psi	150 psi
Maximum Temperature:	140 °F	140 °F

SigmaMotor Inc.
 PO Box 298, 3 North Main Street
 Middleport, NY 14105
 Tel: 716.735.3115 Fax: 716.735.3425
 info@sigmamotorinc.com
 www.SigmamotorInc.com

